
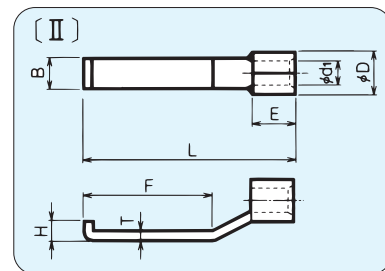


銅線用裸圧着端子 板 状 形 端 子 〈AP形〉

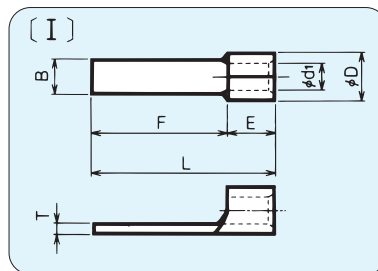


RoHS 指令対応品

規格			呼 び	タイプ	各 部 の 寸 法							適 合 電 線 範 囲			適合工具	一箱入数											
		曲げ			B	L	F	E	φD	φd ₁	T	H	単線mm	撚線mm ²			AWG										
			● AP-0.5	I	1.6	11.0	7.0	4.0	2.3	1.2	0.5	—	0.5-0.8	0.2-0.5	24-20	DS031,DH-1B	1,000 (100×10)										
UL			● AP-1.25S		1.0	14.0	9.7	4.3	3.4	1.7	0.8		0.57 ∟ 1.44	0.25 ∟ 1.65	22-16	*DS031 *DS-H18 *DH-1B *DS-A5 *DS-Hi34S PALM-125A PALM-12A											
			● AP-1.25N8		1.2	12.3	8.0																				
UL			● AP-1.25M		2.1	17.0	12.7																				
UL	SP		● AP-1.25		3.1																						
UL			● AP-1.25-9		2.1	13.3	9.0																				
UL			● AP-1.25-9B		3.1																						
UL			● AP-1.25-10		2.1	14.5	10.2																				
UL			● AP-1.25L			21.0	16.7																				
UL			● AP-2M		2.1	17.0	12.7																				
UL	SP		● AP-2		3.1																						
UL			● AP-2-9		2.1	13.3	9.0																				
UL			● AP-2-9B		3.1																						
UL			● AP-2L		2.1	21.0	16.7																				
UL			● AP-2LB		3.2																						
UL	SP		● AP-5.5		3.5	20.7	14.4											6.3	5.6	3.4	1.0	—	1.82 ∟ 2.89	2.63 ∟ 6.64	12-10	*DS-H18*DS-H214 *DH-1B,*DS-A5 *DS-E14,PALM-125A	500 (100×5)
UL			● AP-5.5L		3.3	24.5	18.2																				
UL			● AP-5.5B		4.5	19.3	13.0																				
UL			● AP-8	21.3																							
UL			AP-1.25TU	II	3.0	21.5	13.2	4.3	3.4	1.7	0.8	1.8	0.57~1.44	0.25~1.65	22-16	(注1)	1,000 (100×10)										
UL			AP-2TU						4.2	2.3			1.14~1.82	1.04~2.63	16-14	(注2)											

- 各呼びの印は、UL登録品、CSA登録品です。
- CSA登録品としてご使用の際は、注文時にご指示ください。
カートンがCSA品用となります。
- 上記寸法表にかぎらず特注品もご相談ください。
(注1.) *DS-H12, *DS-H18, *DS031, *DH-1B, *DS-A5, PALM-125 (注2.) *DS-H12, *DS-H18, *DS-H214, *DH-1B, *DS-A5, *DS-E14, PALM-125A
- *印はUL適合工具です。
- ・▲印は舌部曲げ加工対象品です。
(注) 曲げ加工品は各規格に適合していません。曲げ加工品の各寸法は曲げる角度により、異なります。

板状形端子は通常の電流よりも60%~70%位の目安でご使用下さい。


銅線用裸圧着端子 旗 形 端 子 〈D形〉

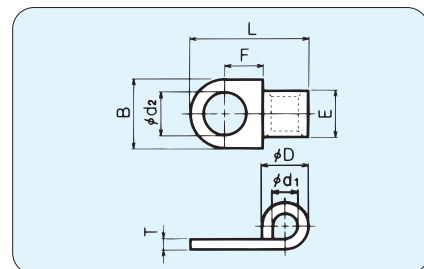

RoHS 指令対応品

呼 び	各 部 の 寸 法								適 合 電 線 範 囲			一箱入数
	φd ₂	B	L	F	E	φD	φd ₁	T	単線mm	撚線mm ²	AWG	
D 1-3	3.7	6.0	9.4	3.3	4.0	3.4	1.7	0.75	0.57~1.44	0.25~1.65	22-16	1,000 (100×10)
D 2-3			10.0				4.0	2.3	0.8	1.14~1.82	1.04~2.63	

(I)



(II)

