


# 銅線用絶縁被覆付圧着端子 丸形端子 〈RBP形〉 〈RBC形〉

JIS JQ0608003

66230

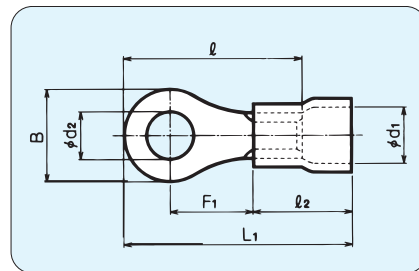

## ◆拡管形

RoHS 指令対応品

| 呼 び |      |                           | 各 部 の 寸 法        |      |                  |                |                |      |                | 標準色 | 適合電線範囲 |                   | 適合工具  | 一箱入数                                                         |                |
|-----|------|---------------------------|------------------|------|------------------|----------------|----------------|------|----------------|-----|--------|-------------------|-------|--------------------------------------------------------------|----------------|
| 規格  | ナイロン |                           | φ d <sub>2</sub> | B    | φ d <sub>1</sub> | F <sub>1</sub> | ℓ <sub>2</sub> | ℓ    | L <sub>1</sub> |     | 板厚     | 燃線mm <sup>2</sup> |       |                                                              | AWG            |
|     | SE   | RBP1.25-2                 | 2.5              | 5.5  | 4.0              | 4.8            | 9.0            | 12.0 | 16.5           | 0.8 | 赤※     | 0.5<br>〃<br>1.65  | 20-16 | DS-Hi3<br>DS-Hi34<br>DS-Hi34S<br>DH-1B<br>DS-A5<br>PALM-032A | 500<br>(100×5) |
| JIS | SE   | RBP1.25-3 (RBC1.25-3)     |                  |      |                  | 6.6            |                | 13.8 | 18.3           |     |        |                   |       |                                                              |                |
|     | SE   | RBP1.25-M3                | 3.2              | 5.6  |                  | 7.6            | 9.0            | 14.9 | 19.4           |     |        |                   |       |                                                              |                |
|     |      | RBP1.25-N3                |                  | 6.6  |                  | 6.6            |                | 14.4 | 18.9           |     |        |                   |       |                                                              |                |
|     | SE   | RBP1.25-V3                | 3.7              | 8.0  |                  | 7.5            | 9.0            | 15.5 | 20.0           |     |        |                   |       |                                                              |                |
|     | SE   | RBP1.25-L3                |                  | 5.5  |                  | 4.8            |                | 12.0 | 16.5           |     |        |                   |       |                                                              |                |
|     | SE   | RBP1.25-S3.5              | 4.3              | 6.6  |                  | 6.6            | 9.0            | 13.8 | 18.3           |     |        |                   |       |                                                              |                |
|     | SE   | RBP1.25-M3.5              |                  | 5.6  |                  | 7.6            |                | 14.9 | 19.4           |     |        |                   |       |                                                              |                |
|     |      | RBP1.25-N3.5              | 5.3              | 8.0  |                  | 7.5            | 9.0            | 15.5 | 20.0           |     |        |                   |       |                                                              |                |
| JIS | SE   | RBP1.25-3.5 (RBC1.25-3.5) |                  | 6.6  |                  | 6.6            |                | 14.4 | 18.9           |     |        |                   |       |                                                              |                |
|     | SE   | RBP1.25-S4                | 6.4              | 11.5 |                  | 10.0           | 9.0            | 18.5 | 23.0           |     |        |                   |       |                                                              |                |
| JIS | SE   | RBP1.25-4 (RBC1.25-4)     |                  | 8.0  |                  | 7.5            |                | 15.5 | 20.0           |     |        |                   |       |                                                              |                |
| JIS | SE   | RBP1.25-5 (RBC1.25-5)     | 10.5             | 13.6 |                  | 10.5           | 9.0            | 20.2 | 24.7           |     |        |                   |       |                                                              |                |
|     |      | RBP1.25-L5                |                  | 22.0 |                  | 14.0           |                | 29.5 | 34.0           |     |        |                   |       |                                                              |                |
|     | SE   | RBP1.25-6                 | 13.0             | 13.6 |                  | 10.5           |                | 21.8 | 26.3           |     |        |                   |       |                                                              |                |
|     | SE   | RBP1.25-8                 | 13.0             | 13.6 |                  | 10.5           | 9.0            | 20.2 | 24.7           |     |        |                   |       |                                                              |                |
|     | SE   | RBP1.25-10                |                  | 13.6 |                  | 10.5           |                | 21.8 | 26.3           |     |        |                   |       |                                                              |                |
|     |      | RBP1.25-A10               | 13.0             | 13.6 |                  | 10.5           | 9.0            | 20.2 | 24.7           |     |        |                   |       |                                                              |                |
|     |      | RBP1.25-12                |                  | 13.6 |                  | 10.5           |                | 21.8 | 26.3           |     |        |                   |       |                                                              |                |
|     | SE   | RBP2-3                    | 3.2              | 6.6  | 4.5              | 5.2            | 9.0            | 13.0 | 17.5           | 0.8 | 青※     | 1.04<br>〃<br>2.63 | 16-14 | DS-Hi4<br>DS-Hi34<br>DS-Hi34S<br>DH-1B<br>DS-A5<br>PALM-032A | 500<br>(100×5) |
|     | SE   | RBP2-M3                   |                  | 5.5  |                  | 6.5            |                | 12.4 | 16.9           |     |        |                   |       |                                                              |                |
|     | SE   | RBP2-L3                   | 3.7              | 5.8  |                  | 6.5            |                | 13.7 | 18.2           |     |        |                   |       |                                                              |                |
|     |      | RBP2-M3.5                 |                  | 6.6  |                  | 5.2            |                | 13.9 | 18.4           |     |        |                   |       |                                                              |                |
| JIS | SE   | RBP2-3.5 (RBC2-3.5)       | 4.3              | 6.6  |                  | 8.3            |                | 13.0 | 17.5           |     |        |                   |       |                                                              |                |
|     | SE   | RBP2-L3.5                 |                  | 5.8  |                  | 8.3            |                | 16.0 | 20.5           |     |        |                   |       |                                                              |                |
|     | SE   | RBP2-M4                   | 5.3              | 8.0  |                  | 6.5            |                | 14.3 | 18.8           |     |        |                   |       |                                                              |                |
|     | SE   | RBP2-S4                   |                  | 9.5  |                  | 8.3            |                | 16.0 | 20.5           |     |        |                   |       |                                                              |                |
| JIS | SE   | RBP2-4 (RBC2-4)           | 6.4              | 12.0 |                  | 7.8            |                | 16.5 | 21.0           |     |        |                   |       |                                                              |                |
|     | SE   | RBP2-S5                   |                  | 18.0 |                  | 11.0           |                | 17.0 | 21.5           |     |        |                   |       |                                                              |                |
| JIS | SE   | RBP2-5 (RBC2-5)           | 8.4              | 16.0 |                  | 14.0           |                | 21.5 | 26.0           |     |        |                   |       |                                                              |                |
|     |      | RBP2-L5                   |                  | 20.0 |                  | 14.0           |                | 27.5 | 32.0           |     |        |                   |       |                                                              |                |
| JIS | SE   | RBP2-6 (RBC2-6)           | 10.5             | 14.5 |                  | 12.3           |                | 24.0 | 28.5           |     |        |                   |       |                                                              |                |
| JIS | SE   | RBP2-8 (RBC2-8)           |                  | 18.0 |                  | 14.0           |                | 27.5 | 32.0           |     |        |                   |       |                                                              |                |
|     |      | RBP2-A8                   | 13.0             | 20.0 |                  | 18.0           |                | 32.5 | 37.0           |     |        |                   |       |                                                              |                |
|     |      | RBP2-B8                   |                  | 17.0 |                  | 13.9           |                | 26.9 | 31.4           |     |        |                   |       |                                                              |                |
|     | SE   | RBP2-10                   | 13.0             | 22.0 |                  | 14.0           |                | 29.5 | 34.0           |     |        |                   |       |                                                              |                |
|     |      | RBP2-A10                  |                  | 17.0 |                  | 13.9           |                | 26.9 | 31.4           |     |        |                   |       |                                                              |                |
|     |      | RBP2-B10                  | 13.0             | 22.0 |                  | 14.0           |                | 29.5 | 34.0           |     |        |                   |       |                                                              |                |
|     | SE   | RBP2-12                   |                  | 17.0 |                  | 13.9           |                | 26.9 | 31.4           |     |        |                   |       |                                                              |                |
|     |      | RBP2-A12                  | 13.0             | 22.0 |                  | 14.0           |                | 29.5 | 34.0           |     |        |                   |       |                                                              |                |
|     |      | RBP2-B12                  |                  | 17.0 |                  | 13.9           |                | 26.9 | 31.4           |     |        |                   |       |                                                              |                |

1. 各呼びの印は、JIS規格品、CSA登録品です。( )はJIS規格品の呼びを示します。
  2. CSA登録品としてご使用の際は、注文時にご指示ください。カートンがCSA品用となります。
  3. 上記寸法表にかぎらず特注品もご相談ください。
- ※…表の絶縁被覆のカラーは、あくまで標準色です。ご用意できるカラーはP.20をご参照下さい。

