
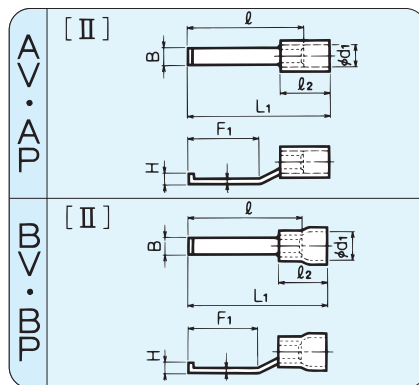
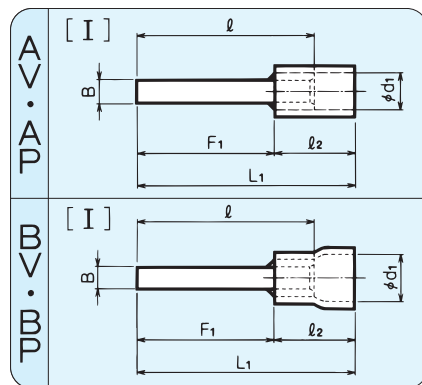


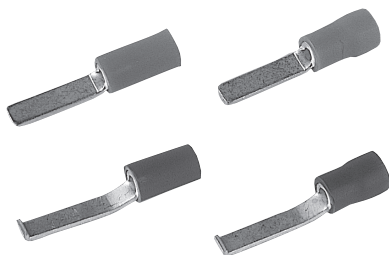

RoHS 指令対応品

	呼　　び		呼　　び		タイプ	各　部　の　寸　法							標準色	適合電線範囲		適合工具	一箱入数			
	規　格	ビ　ニ　ル	規格	ナイロン		B	φd ₁ BV BP	F ₁	ℓ ₂	ℓ	L ₁	板厚		H	燃線mm ²			AWG		
スト レ ー ト 形		AVAP-0.5		APAP-0.5	I	1.6	2.2	7.0		11.0	16.5	0.5	—	黄※	0.3-0.5	22-20	DS05N,DH-1B PALM-032A	1,000(100×10)		
		AVAP-1.25S		APAP-1.25S		1.0	3.3	9.7		14.0	19.2	0.8			赤※	0.25 ∩ 1.65	20-16	*DS-Hi3 *DS-Hi34 *DS-Hi34S *DH-1B *DS-A5 PALM-032A	500 (100×5)	
		AVAP-1.25N8		APAP-1.25N8		1.2		8.0		12.3	17.5									
		AVAP-1.25M		APAP-1.25M		2.1		12.7		17.0	22.2									
	UL	AVAP-1.25	SF	APAP-1.25		3.1		9.0	13.3	18.5										
	UL	AVAP-1.25-9		APAP-1.25-9		2.1														
		AVAP-1.25-9B		APAP-1.25-9B		3.1		10.2		14.5	19.7									
		AVAP-1.25-10		APAP-1.25-10			16.7		21.0	26.2										
	UL	AVAP-1.25L		APAP-1.25L		2.1	3.9	9.0	13.3	18.5										
		AVAP-2M		APAP-2M							12.7				17.0	22.2				
	UL	AVAP-2	SF	APAP-2		3.1					16.7	21.0			26.2					
	UL	AVAP-2-9		APAP-2-9		2.1														
		AVAP-2-9B		APAP-2-9B		3.1														
	UL	AVAP-2L		APAP-2L		2.1														
	AVAP-2LB		APAP-2LB	3.2	3.3	5.4	14.4	20.7	28.4											
UL	AVAP-5.5	SF	APAP-5.5	4.5						18.2	32.2									
UL	AVAP-5.5L		APAP-5.5L									19.3	27.0							
	AVAP-5.5B		APAP-5.5B								1.0	—	黄※	2.63 ∩ 6.64	12-10	*DS-Hi5 *DH-1B *DS-A5	300 (100×3)			
拡 管 形		BVAP-0.5		—	I	1.6	3.2	—	7.0	11.0	16.0	0.5	—	黄※	0.3~0.5	22-20	DS05N,DH-1B PALM-032A	1,000(100×10)		
		BVAP-1.25S		BPAP-1.25S		1.0	4.1	4.0	9.7		14.0	18.7			0.8	赤※	0.25 ∩ 1.65	20-16	*DS-Hi3 *DS-Hi34 *DS-Hi34S *DH-1B *DS-A5 PALM-032A	500 (100×5)
		BVAP-1.25N8		BPAP-1.25N8		1.2			8.0		12.3	17.0								
		BVAP-1.25M		BPAP-1.25M		2.1			12.7		17.0	21.7								
	UL	BVAP-1.25	SF	BPAP-1.25		3.1			9.0	13.3	18.0									
	UL	BVAP-1.25-9		BPAP-1.25-9		2.1														
		BVAP-1.25-9B		BPAP-1.25-9B		3.1			10.2		14.5	19.2								
		BVAP-1.25-10		BPAP-1.25-10			16.7		21.0	25.7										
	UL	BVAP-1.25L		BPAP-1.25L		2.1	4.7	4.5	9.0	13.3	18.0									
		BVAP-2M		BPAP-2M								12.7				17.0	21.7			
	UL	BVAP-2	SF	BPAP-2		3.1						16.7			21.0	25.7				
	UL	BVAP-2-9		BPAP-2-9		2.1														
		BVAP-2-9B		BPAP-2-9B		3.1														
	UL	BVAP-2L		BPAP-2L		2.1														
		BVAP-2LB		BPAP-2LB		3.2	3.3	6.4	—	14.4	20.7	27.9								
	UL	BVAP-5.5		—		4.5									18.2	31.7				
	UL	BVAP-5.5L		—													19.3	26.5		
		BVAP-5.5B		—											1.0	—	黄※	2.63 ∩ 6.64	12-10	*DS-Hi5 *DH-1B *DS-A5
I スト レ 形	UL	AVAP-1.25TU		APAP-1.25TU	II	3.0	3.3	13.2	9.5	21.5	26.7	0.8	1.8	赤※	0.5~1.65	20-16	(注1)	500 (100×5)		
	UL	AVAP-2TU		APAP-2TU			3.9							青※	1.04~2.63	16-14	(注2)			
拡 管 形	UL	BVAP-1.25TU		BPAP-1.25TU		3.0	4.1 4.7	4.0 4.5	13.2	9.0	21.5	26.2	0.8	1.8	赤※	0.5~1.65	20-16	(注1)	500 (100×5)	
	UL	BVAP-2TU		BPAP-2TU											青※	1.04~2.63	16-14	(注2)		

1. 各呼びの印は、UL登録品、CSA登録品です。

2. CSA登録品としてご使用の際は、注文時にご指示
ください。カートンがCSA品用となります。


3. *印はUL適合工具です。

※…表の絶縁被覆のカラーは、あくまで標準色です。
ご用意できるカラーはP. 20をご参照下さい。板状形端子は通常の電流よりも60%~70%
位の目安でご使用下さい。

(注1) *HS-Hi3, *DS-Hi34, *DS-Hi34S, *DH-1B, *DS-A5, PALM-032A (注2) *HS-Hi4, *DS-Hi34, *DS-Hi34S, *DH-1B, *DS-A5, PALM-032A


AV · AP

[I]




BV · BP

[I]



AV · AP

[II]



BV · BP

[II]

