
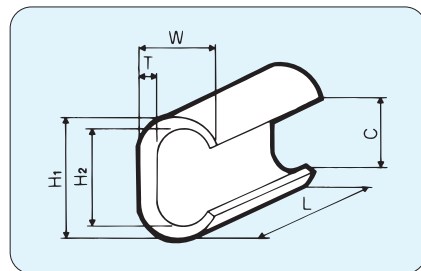



分岐接続用コネクタ 〈T形〉

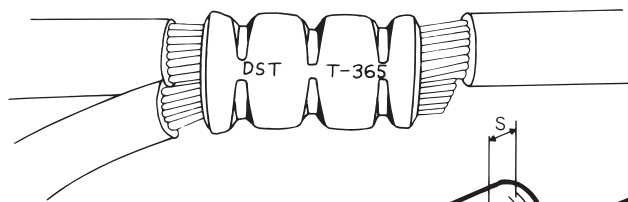

RoHS指令対応品

呼 び	各 部 の 寸 法						圧縮回数と位置		適用電線 合計断面積 (mm ²)	適合工具	一箱入数
	H ₁	H ₂	W	L	T	C	回数	S			
T-11	9.5	6.3	6.2	12	1.6	4.0	2	6.0	7.5~11	EH-2C	500 (100×5)
T-16	11.8	7.8	7.8	13	2.0	5.0		7.0	11.5~16		300 (100×3)
T-20	12.8	8.6	9.7	16	2.9	5.1	1		14~20	REC-Li15S	200 (100×2)
T-26	14.7	10.2	10.9								
T-44	19.0	13.4	14.4	20	4.0	8.5	2	11.0	21~26	15号B	100
T-60	21.0	15.4	15.1								
T-76	24.4	17.3	17.6	22	5.0	10.8	3	12.0	61~76	EP-16	50
T-98	27.5	20.5	19.2								
T-122	29.8	22.1	21.2	26	5.5	13.5	2	11.0	77~98	16号B, EP-16, EP-520C	40
T-154	34.0	25.7	24.4								
T-190	37.0	28.5	25.4	35	6.0	17.4	3	12.0	8.5	16号B	30
T-240	40.0	30.2	28.5								
T-288	44.5	34.7	31.1	45	7.0	22.3	3	14.5	10.5	EP-16	15
T-365	47.5	37.7	34.0								
T-450	57.0	42.5	41.0	60	10.0	28.0	3	16.0	13.0	EP-520C	10
T-560	62.0	46.0	45.0								
T-700	68.0	51.0	49.5	70	12.0	34.0	3	18.5	14.5	EP-520C	10
								20.0	16.0	EP-520C	4
								21.0	18.5	EP-520C	4
									21.0	561~700	2

電線組合せ表 T形コネクタ



分岐線mm ² 本線mm ²	2 (φ1.6)	3.5 (φ2.0)	5.5 (φ2.6)	8	14	22	38	60	100	150	200	250	325
5.5 (φ2.6)	11	11	11										
8	11	16	16	16・20									
14	16・20	20	20	26	44								
22	26	26	44	44	44	44							
38	44	44	44	60	60	60	76						
60	76	76	76	76	76	98	98	122					
100	122	122	122	122	122	122	154	190	240				
150	154	154	190	190	190	190	190	240	288	365			
200	240	240	240	240	240	240	240	288	365	365	450		
250			288	288	288	288	288	365	365	450	450	560	
325			365	365	365	365	365	450	450	560	560	700	700
400							450	560	560	560	700	700	
500							560	560	700	700	700		
600							700	700	700				

- 材質は軟質ビニルです。
- 色は黒です。




分岐接続用 (T形) コネクタカバー 製造元: SATO, 八鹿電機株式会社


呼 び	A	B	C	D	E	F	G
T-20用	71	28	24	19	18	16	14
T-26用	80	29	27	24	20	18	16
T-44用	82	30	30	22	22	20	18
T-60用	84	28	34	22	26	23	21
T-76用	84	28	34	22	28	25	22
T-98用	97	31	41	25	31	27	23
T-122用	98	31	42	25	33	28	24
T-154用	100	31	44	25	35	28	24
T-190用	110	29	51	30	37	31	25
T-240用	135	43	56	36	37	31	25
T-288用	135	41	62	32	38	33	28
T-365用	137	39	61	37	40	36	31
T-450用	175	55	65	55	36	54	36
T-560用	190	60	70	60	40	62	40
T-700用	205	65	75	65	42	68	42

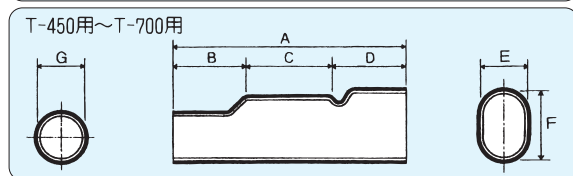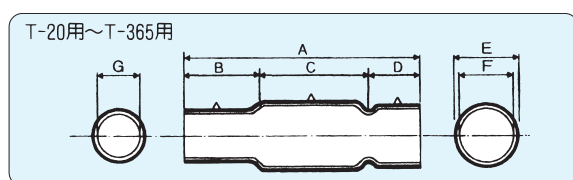

T-20用カバーは、T-11、T-16も兼用できます。



T-20用~T-365用

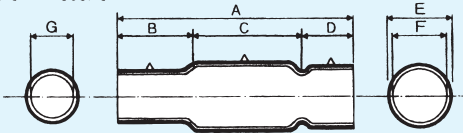

T-450用~T-700用

