


銅線用裸圧着端子 ニツ穴端子 〈RD形〉

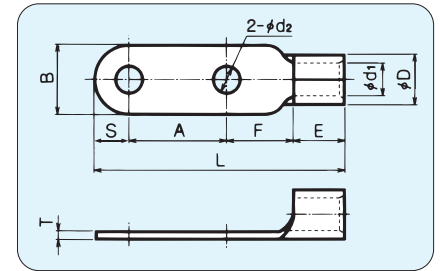

RoHS 2指令対応品

規格				呼 び	各 部 の 寸 法									適合電線範囲		適合工具	一箱入数			
規 格	曲げ				φ d ₂	A	B	L	F	S	E	φ D	φ d ₁	T	撚線mm ²			AWG		
	UL	SE	▲	RD38-10	11.0	32.0	22.0	84.0	28.0	11.0	13.0	13.3	9.4	1.8	26.66	2	*DS-HO60 *DS-HO150 *DS-E60 *DS-E150 *DS-E200M *DS-E250M REC-Li325	50		
	UL	SE	▲	RD38-12	14.0	40.0		20.0	42.42											
			●	RD38-X	—	—		—	—											
15	UL	SE		RD60-10	11.0	32.0	40.0	80.0	19.0	11.0	18.0	15.5	11.4	2.0	42.42 ∟ 60.57	1/0			*DS-HO60 *DS-HO150 *12号A *DS-E60 *DS-E150 *DS-E200M *DS-E250M REC-Li325	40
15	UL	SE		RD60-12	14.0			88.0	—								—	40		
15	UL	SE		RD60-14	16.0			96.0	22.0								16.0			
			●	RD60-10X	—	—	22.0	80.0	—	—	30									
			●	RD60-12X			88.0	30												
			●	RD60-14X			32.0					96.0								
	UL	SE		RD70-10	11.0	32.0	40.0	80.0	17.0	12.0	19.0	17.5	13.5	2.0	60.57 ∟ 76.28	2/0	*DS-HO150 *DS-E150 *DS-E200M *DS-E250M REC-Li325	25		
	UL	SE	●	RD70-12	14.0	24.0		91.0	20.0											
	UL	SE	●	RD70-14	16.0	32.0		96.0	21.0										16.0	
			●	RD70-10X	—	—	24.0	80.0	—	—	25									
			●	RD70-12X			91.0													
			●	RD70-14X			32.0	96.0												
	UL	SE	●	RD80-10	11.0	32.0	40.0	27.0	85.0	20.5	13.5	19.0	19.5	14.5	2.3	76.28 ∟ 96.3	3/0	*DS-HO150 *12号A *DS-E150 *DS-E200M *DS-E250M REC-Li325	25	
	UL	SE	●	RD80-12	14.0	27.0		93.0	23.0											16.0
	UL	SE	●	RD80-14	16.0	32.0		98.0	23.0											16.0
			●	RD80-10X	—	—	27.0	85.0	—	—	20									
			●	RD80-12X			93.0													
			●	RD80-14X			32.0	98.0												
15	UL	SE		RD100-10	11.0	32.0	40.0	28.5	85.0	19.8	14.2	19.0	22.3	16.4	2.6	96.3 ∟ 117.2	4/0	*DS-HO150 *12号A *DS-E150 *DS-E200M *DS-E250M REC-Li325	20	
15	UL	SE		RD100-12	14.0	28.5		93.0	23.0											16.0
15	UL	SE		RD100-14	16.0	32.0		98.0	23.0											16.0
			●	RD100-10X	—	—	28.5	85.0	—	—	12									
			●	RD100-12X			93.0													
			●	RD100-14X			32.0	98.0												
15	UL	SE		RD150-12	14.0	40.0	40.0	36.0	106.0	21.0	18.0	27.0	26.5	19.5	3.2	117.2 ∟ 152.05	250-300 MCM	*DS-HO150 *12号A *DS-E150 *DS-E200M *DS-E250M REC-Li325	12	
15	UL	SE		RD150-14	16.0				—	—										
			●	RD150-X	—	—														
	UL	SE	●	RD180-12	14.0	40.0	40.0	38.5	111.0	22.8	19.2	29.0	28.5	21.0	3.5	152.05 ∟ 192.6	300-350 MCM			*12号A *DS-E200M *DS-E250M REC-Li325
	UL	SE		RD180-14	16.0				—	—										
			●	RD180-X	—	—														
15	UL	SE		RD200-12	14.0	40.0	40.0	44.0	117.0	22.5	22.0	32.5	32.7	24.0	4.0	192.6 ∟ 242.27	400 MCM	*DS-E250M REC-Li325	8	
15	UL	SE		RD200-14	16.0				—	—										
			●	RD200-X	—	—														
				RD250-12	14.0	40.0	40.0	44.0	117.0	22.5	22.0	32.5	35.6	26.0	4.5	250	—			DS-E250M
				RD250-14	16.0				—	—										
			●	RD250-X	—	—														
15	UL	SE		RD325-12	14.0	40.0	40.0	50.5	124.0	22.3	25.2	36.5	37.6	28.0	4.5	242.27 ∟ 325.0	500-600 MCM	*12号A REC-Li325	4	
15	UL	SE		RD325-14	16.0				—	—										
			●	RD325-X	—	—														

- 各呼びの印は、JIS規格品、UL登録品、CSA登録品です。
- CSA登録品としてご使用の際は、注文時にご指示ください。カートンがCSA品用となります。
- ピッチ（A寸法）をご要望により変更することもできます。
- *印はUL適合工具です。
- ・▲印は舌部曲げ加工対象品です。
- ▲印はご注文前に弊社または弊社営業所まで必ずお問合せ下さい。（注）曲げ加工品は各規格に適合していません。曲げ加工品の各寸法は曲げる角度により、異なります。