


銅線用絶縁被覆付圧着端子 丸形端子 〈RAP形〉 〈RAC形〉

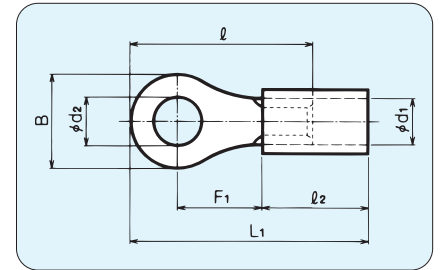

◆ストレート形

RoHS2指令対応品

呼 び		各 部 の 寸 法								標準色	適合電線範囲		適合工具	一箱入数
規格	ナイロン	φd ₂	B	φd ₁	F ₁	ℓ ₂	ℓ	L ₁	板厚		撚線mm ²	AWG		
	RAP3.5-S4	4.3	7.0	4.9	8.3	14.0	17.1	25.8	1.0	黄※	2.63 4.6	12	DS-Hi5 DH-1B DS-A5	300 (100×3)
㊞	RAP3.5-4		8.5				17.8	26.5						
㊞	RAP3.5-5	5.3												
㊞	RAP3.5-6	6.4	12.0				21.8	30.5						
㊞	RAP3.5-8	8.4	14.5				25.0	33.7						
㊞	RAP3.5-10	10.5												
	RAP3.5-12	13.0	20.0		15.7		31.0	39.7						200 (100×2)
㊞	RAP5.5-V3	3.2	7.2	5.4	8.5	14.0	15.8	23.5	1.0	黄※	2.63 6.64	12-10	DS-Hi5 DH-1B DS-A5	300 (100×3)
㊞	RAP5.5-M3		7.1				18.3	26.0						
㊞	RAP5.5-V3.5	3.7	7.2				15.8	23.5						
㊞	RAP5.5-3.5		7.7				17.3	25.0						
㊞	RAP5.5-M3.5		7.1				18.3	26.0						
㊞	RAP5.5-V4	4.3	7.2				15.8	23.5						
㊞	RAP5.5-S4		7.7				17.3	25.0						
	RAP5.5-N4	4.4	8.0				18.8	26.5						
㊞	RAP5.5-M4	4.3	7.1				18.3	26.0						
㊞	RAP5.5-4 (RAC5.5-4)		9.5				19.5	27.2						
㊞	RAP5.5-S5	5.3	8.0				18.8	26.5						
㊞	RAP5.5-5 (RAC5.5-5)		9.5				19.5	27.2						
	RAP5.5-L5	6.4	12.0				22.5	30.2						200 (100×2)
	RAP5.5-S6		9.5				19.5	27.2						
㊞	RAP5.5-6 (RAC5.5-6)						22.5	30.2						
	RAP5.5-L6						26.3	34.0						
	RAP5.5-A6	8.4					29.8	37.5						100
㊞	RAP5.5-8 (RAC5.5-8)		15.0				27.3	35.0						
㊞	RAP5.5-10 (RAC5.5-10)													
	RAP5.5-12		20.0				32.0	39.7						
	RAP5.5-14	15.0	32.0				48.0	55.7						
	RAP5.5-16													
	RAP5.5-20		21.0											

1. 各呼びの印は、JIS規格品、CSA登録品です。()はJIS規格品の呼びを示します。
 2. CSA登録品としてご使用の際は、注文時にご指示ください。カートンがCSA品用となります。
 3. 上記寸法表にかぎらず特注品もご相談ください。
- ※…表の絶縁被覆のカラーは、あくまで標準色です。ご用意できるカラーはP.20をご参照下さい。