
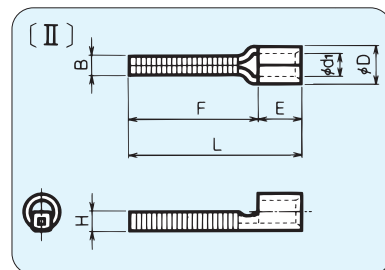


銅線用裸圧着端子 棒状形端子 〈A形〉

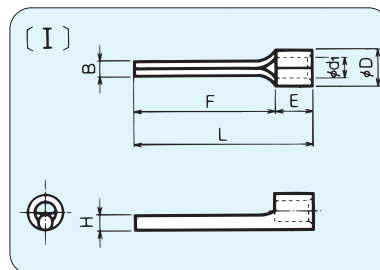

RoHS2指令対応品


呼 び			タイプ	各 部 の 寸 法								適 合 電 線 範 囲			適 合 工 具	一箱入数													
				B	H	L	F	E	φD	φd ₁	T	単線mm	撚線mm ²	AWG															
		A-0.3	I	1	1.0	1.0	14.0	10.0	4.0	2.3	0.8	0.65	0.32~0.6	0.1~0.3	26-22	DS031 DH-1B DS-A5	1,000 (100×10)												
		A-0.5									1.2	0.5	0.5~0.8	0.2~0.5	24-20														
UL	SE	A-1.25			1.7	1.7	17.0	12.7	4.3	3.4	1.7	0.8	0.57 1.44	0.25 1.65	22-16	*DS031 *DS-H18 *DH-1B *DS-A5 *DS-Hi34S PALM-125A PALM-12A													
UL		A-1.25N																											
		A-1.25N8			1.3	1.3	17.5	13.2																					
UL	SE	A-1.25L					12.3	8.0																					
UL	SE	A-1.25LB			1.6	1.4	21.3	17.0																					
UL	SE	A-2			1.7	1.7																							
UL	SE	A-2L			1.6	1.6	17.0	12.7	4.3	4.2	2.3	0.8	1.14 1.82	1.04 2.63	16-14	*DS-H18,*DS-H214 *DH-1B,*DS-A5 *DS-E14,*DS-Hi34S PALM-125A,PALM-12A													
UL	SE	A-2LB				1.4	21.3	17.0																					
UL	SE	A-5.5			1.7	1.7	21.0	14.7										6.3	5.6	3.4	1.0	1.82 2.89	2.63 6.64	12-10	*DS-H18,*DS-H214 *DH-1B,*DS-A5 *DS-E14 PALM-125A				
UL		A-5.5L																								2.0	2.0	25.8	19.5
		A-5.5LL																										30.3	24.0
UL		A-8D	II	2	3.5	3.5	33.5	25.2	8.3	7.1	3.5	1.2	1.82~2.89	2.63~6.64	12-10	*DS-H18 *DS-H214 *DS-E14	300 (100×3)												
UL		A-8									4.5		2.89~3.65	6.64~10.52	8														
UL		A-14S									40.5		30.5	10.0	9.0			5.8	1.6	3.65~4.62	10.52~16.78	6	*DS-H214 *DS-E14 (注1)	200 (100×2)					
UL		A-14			4.5	4.5	47.0	35.6	11.4	11.5	7.7	1.8	4.62~5.81	16.78~26.66	4	(注1)	100												
UL		A-22S			3.5	3.5																							
UL		A-22			6.5	6.5																							
UL		A-38			6.9	6.9	50.0	37.0	13.0	13.3	9.4	2.0	5.81~7.34	26.66~42.42	2	(注1, 注2)	50												
UL		A-60					55.0		18.0	15.5	11.4		7.34~8.26	42.42~60.57	1/0														

1. 各呼びの印は、UL登録品、CSA登録品です。
2. CSA登録品としてご使用の際は、注文時にご指示ください。カートンがCSA品用となります。
3. 上記寸法表にかぎらず特注品もご相談ください。
4. (注1) *DS-H060, *DS-H0150, *DS-E60, *DS-E150, *DS-E200M, *DS-E250M, REC-Li325
(注2) *12号A
5. *印はUL適合工具です。

棒状形端子は通常の電流よりも60%~70%位の目安でご使用下さい。

※棒状形端子用絶縁キャップは、47ページをご参照下さい。

銅線用裸圧着端子 アース端子 〈R形〉

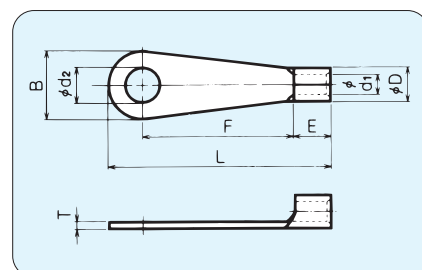

RoHS2指令対応品

規格	呼び	各部の寸法								適合電線範囲			適合工具	一箱入数
		φd ₂	B	L	F	E	φD	φd ₁	T	単線mm	撚線mm ²	AWG		
UL	R2-E4	4.3	8.5	28.8	20.0	4.5	4.2	2.3	0.8	1.14	1.04	16-14	*DS-H18,*DS-H214 *DS-E14,*DH-1B *DS-A5,*DS-Hi34S PALM-125A,PALM-12A	500 (100×5)
UL	R2-E5	5.3								1.82	2.63			
UL	R2-E6	6.4	12.0	30.5										

1. 各呼びの印は、UL登録品です。
2. *印はUL適合工具です。

DAIDO SOLDERLESS TERMINAL MFG.CO.,LTD