
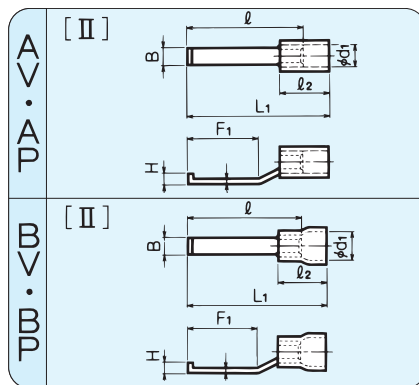
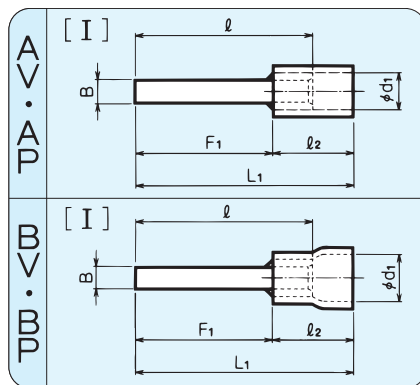


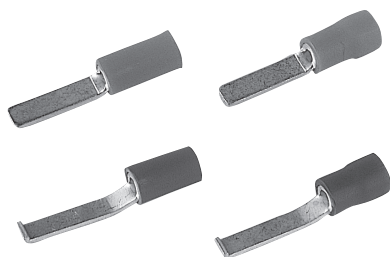

RoHS2指令対応品

	呼　　び		呼　　び		タイプ	各　部　の　寸　法								標準色	適合電線範囲		適合工具	一箱入数	
	規　格	ビ　ニ　ル	規格	ナイロン		B	ϕd_1 BV　BP	F ₁	ℓ_2	ℓ	L ₁	板厚	H		燃線mm ²	AWG			
スト レ ー ト 形		AVAP-0.5		APAP-0.5	Ⅰ	1.6	2.2	7.0		11.0	16.5	0.5		黄※	0.3-0.5	22-20	DS05N DH-1B	1,000(100×10)	
		AVAP-1.25S		APAP-1.25S		1.0		9.7		14.0	19.2			赤※	0.25 └ 1.65	20-16	*DS-Hi3 *DS-Hi34S *DH-1B *DS-A5	500 (100×5)	
		AVAP-1.25N8		APAP-1.25N8		1.2		8.0		12.3	17.5								
		AVAP-1.25M		APAP-1.25M		2.1		12.7		17.0	22.2								
	UL	AVAP-1.25	SE	APAP-1.25		3.1	3.3												
	UL	AVAP-1.25-9		APAP-1.25-9		2.1		9.0		13.3	18.5								
		AVAP-1.25-9B		APAP-1.25-9B		3.1													
		AVAP-1.25-10		APAP-1.25-10				10.2	9.5	14.5	19.7	0.8		青※	1.04 └ 2.63	16-14	*DS-Hi4 *DS-Hi34S *DH-1B *DS-A5	500 (100×5)	
	UL	AVAP-1.25L		APAP-1.25L		2.1		16.7		21.0	26.2								
		AVAP-2M		APAP-2M				12.7		17.0	22.2								
	UL	AVAP-2	SE	APAP-2		3.1	3.9												
	UL	AVAP-2-9		APAP-2-9		2.1		9.0		13.3	18.5								
		AVAP-2-9B		APAP-2-9B		3.1													
	UL	AVAP-2L		APAP-2L		2.1		16.7		21.0	26.2								
UL	AVAP-2LB		APAP-2LB	3.2															
UL	AVAP-5.5	SE	APAP-5.5	3.5		14.4		20.7	28.4	1.0		黄※	2.63 └ 6.64	12-10	*DS-Hi5 *DH-1B *DS-A5	300 (100×3)			
UL	AVAP-5.5L		APAP-5.5L	3.3	5.4	18.2	14.0	24.5	32.2			黄※							
UL	AVAP-5.5B		APAP-5.5B	4.5		13.0		19.3	27.0										
拡 管 形		BVAP-0.5		—	Ⅰ	1.6	3.2	—	7.0	11.0	16.0	0.5		黄※	0.3~0.5	22-20	DS05N DH-1B	1,000(100×10)	
		BVAP-1.25S		BPAP-1.25S		1.0		9.7		14.0	18.7			赤※	0.25 └ 1.65	20-16	*DS-Hi3 *DS-Hi34S *DH-1B *DS-A5	500 (100×5)	
		BVAP-1.25N8		BPAP-1.25N8		1.2		8.0		12.3	17.0								
		BVAP-1.25M		BPAP-1.25M		2.1		12.7		17.0	21.7								
	UL	BVAP-1.25	SE	BPAP-1.25		3.1	4.1	4.0											
	UL	BVAP-1.25-9		BPAP-1.25-9		2.1		9.0		13.3	18.0								
		BVAP-1.25-9B		BPAP-1.25-9B		3.1													
		BVAP-1.25-10		BPAP-1.25-10				10.2	9.0	14.5	19.2	0.8		青※	1.04 └ 2.63	16-14	*DS-Hi4 *DS-Hi34S *DH-1B *DS-A5	500 (100×5)	
	UL	BVAP-1.25L		BPAP-1.25L		2.1		16.7		21.0	25.7								
		BVAP-2M		BPAP-2M				12.7		17.0	21.7								
	UL	BVAP-2	SE	BPAP-2		3.1	4.7	4.5											
	UL	BVAP-2-9		BPAP-2-9		2.1		9.0		13.3	18.0								
		BVAP-2-9B		BPAP-2-9B		3.1													
	UL	BVAP-2L		BPAP-2L		2.1		16.7		21.0	25.7								
UL	BVAP-2LB		BPAP-2LB	3.2															
UL	BVAP-5.5		—	3.3	6.4	14.4		20.7	27.9	1.0		黄※	2.63 └ 6.64	12-10	*DS-Hi5 *DH-1B *DS-A5	300 (100×3)			
UL	BVAP-5.5L		—			18.2	13.5	24.5	31.7			黄※							
UL	BVAP-5.5B		—	4.5		13.0		19.3	26.5										
スト レ イ ト 形	UL	AVAP-1.25TU		APAP-1.25TU	Ⅱ	3.0	3.3	13.2	9.5	21.5	26.7	0.8	1.8	赤青※	0.5~1.65	20-16	(注1)	500 (100×5)	
	UL	AVAP-2TU		APAP-2TU			3.9							1.04~2.63	16-14	(注2)			
拡 管 形	UL	BVAP-1.25TU		BPAP-1.25TU		3.0	4.1	4.0	13.2	9.0	21.5	26.2	0.8	1.8	赤青※	0.5~1.65	20-16	(注1)	500 (100×5)
	UL	BVAP-2TU		BPAP-2TU			4.7	4.5						1.04~2.63	16-14	(注2)			

1. 各呼びの印は、UL登録品、CSA登録品です。

2. CSA登録品としてご使用の際は、注文時にご指示
ください。カートンがCSA品用となります。

3. *印はUL適合工具です。

※…表の絶縁被覆のカラーは、あくまで標準色です。
ご用意できるカラーはP. 20をご参照下さい。板状形端子は通常の電流よりも60%~70%
位の目安でご使用下さい。

(注1) *HS-Hi3、*DS-Hi34S、*DH-1B、*DS-A5 (注2) *DS-Hi4、*DS-Hi34S、*DH-1B、*DS-A5