


銅線用絶縁被覆付圧着端子 丸形端子 (RAP形) (RAC形)

JIS JQ0608003

SF 66230

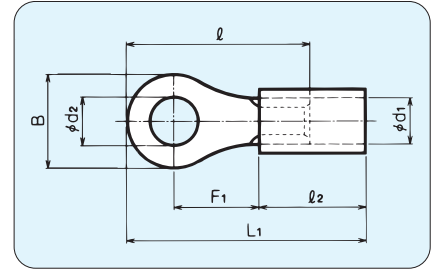

◆ストレート形

RoHS 指令対応品

| 規格 | 呼び ナイロン | 各部の寸法 | | | | | | | 標準色 | 適合電線範囲 | | 適合工具 | 一箱入数 | |
|----|---------------------------|------------|------|------------|-------|-------|------|-------|-----|--------|-------------------|-------|--|-------------------|
| | | ϕd_2 | B | ϕd_1 | F_1 | l_2 | l | L_1 | | 板厚 | 撚線mm ² | | | AWG |
| | RAP0.5-2 | 2.2 | 5.2 | 2.2 | 5.9 | 9.5 | 12.5 | 18.0 | 0.5 | 黄※ | 0.3 } 0.5 | 22-20 | DS05N DH-1B DS-A5 PALM-032A | 1,000 (100×10) |
| | RAP0.5-3 | 3.2 | | | | | | | | | | | | |
| | RAP0.5-3.5 | 3.7 | | | | | | | | | | | | |
| | RAP0.5-4 | 4.3 | | | | | | | | | | | | |
| | RAP0.5-5 | 5.3 | 8.0 | | 7.0 | | | | | | | | | |
| | RAP1.25-2 | 2.5 | 5.5 | 3.3 | 4.8 | 9.5 | 12.0 | 17.0 | 0.8 | 赤※ | 0.5 } 1.65 | 20-16 | DS-Hi3 DS-Hi34 DS-Hi34S DH-1B DS-A5 PALM-032A | 500 (100×5) |
| | RAP1.25-3 (RAC1.25-3) | | | | | | | | | | | | | |
| | RAP1.25-M3 | 3.2 | 6.6 | | 6.6 | | 13.8 | 18.8 | | | | | | |
| | RAP1.25-N3 | | 5.6 | | 7.6 | | 14.9 | 19.9 | | | | | | |
| | RAP1.25-V3 | | 6.6 | | 6.6 | | 14.4 | 19.4 | | | | | | |
| | RAP1.25-L3 | | 8.0 | 7.5 | 15.5 | 20.5 | | | | | | | | |
| | RAP1.25-S3.5 | | 5.5 | 4.8 | 12.0 | 17.0 | | | | | | | | |
| | RAP1.25-M3.5 | 3.7 | 6.6 | 6.6 | 13.8 | 18.8 | | | | | | | | |
| | RAP1.25-N3.5 | | 5.6 | 7.6 | 14.9 | 19.9 | | | | | | | | |
| | RAP1.25-3.5 (RAC1.25-3.5) | | 6.6 | 6.6 | 14.4 | 19.4 | | | | | | | | |
| | RAP1.25-S4 | 4.3 | | 7.5 | 15.5 | 20.5 | | | | | | | | |
| | RAP1.25-4 (RAC1.25-4) | | 8.0 | | 18.5 | 23.5 | | | | | | | | |
| | RAP1.25-5 (RAC1.25-5) | 5.3 | | 10.0 | 20.2 | 25.2 | | | | | | | | |
| | RAP1.25-L5 | | 6.4 | 10.5 | 21.8 | 26.8 | | | | | | | | |
| | RAP1.25-6 | 6.4 | 11.5 | 10.5 | 21.8 | 26.8 | | | | | | | | |
| | RAP1.25-8 | 8.4 | 13.6 | 10.5 | 21.8 | 26.8 | | | | | | | | |
| | RAP1.25-10 | 10.5 | 13.6 | 10.5 | 21.8 | 26.8 | | | | | | | | |
| | RAP1.25-A10 | 10.5 | 13.6 | 10.5 | 21.8 | 26.8 | | | | | | | | |
| | RAP1.25-12 | 13.0 | 22.0 | 14.0 | 29.5 | 34.5 | | | | | | | | |
| | RAP2-3 | | 6.6 | 3.9 | 5.2 | 9.5 | 13.0 | 18.0 | 0.8 | 青※ | 1.04 } 2.63 | 16-14 | DS-Hi4 DS-Hi34 DS-Hi34S DH-1B DS-A5 PALM-032A | 500 (100×5) |
| | RAP2-M3 | 3.2 | 5.5 | | | | | | | | | | | |
| | RAP2-L3 | | 5.5 | | 6.5 | | 13.7 | 18.7 | | | | | | |
| | RAP2-M3.5 | | 5.8 | | 6.5 | | 13.9 | 18.9 | | | | | | |
| | RAP2-3.5 (RAC2-3.5) | 3.7 | | | 5.2 | | 13.0 | 18.0 | | | | | | |
| | RAP2-L3.5 | | 6.6 | 8.3 | 16.0 | 21.0 | | | | | | | | |
| | RAP2-M4 | | 6.6 | 6.5 | 14.3 | 19.3 | | | | | | | | |
| | RAP2-S4 | 4.3 | | 8.3 | 16.0 | 21.0 | | | | | | | | |
| | RAP2-4 (RAC2-4) | | 8.5 | 7.8 | 16.5 | 21.5 | | | | | | | | |
| | RAP2-S5 | | 8.5 | 7.8 | 16.5 | 21.5 | | | | | | | | |
| | RAP2-5 (RAC2-5) | 5.3 | 9.5 | 9.5 | 17.0 | 22.0 | | | | | | | | |
| | RAP2-L5 | | 9.5 | 9.5 | 17.0 | 22.0 | | | | | | | | |
| | RAP2-6 (RAC2-6) | 6.4 | 12.0 | 11.0 | 21.5 | 26.5 | | | | | | | | |
| | RAP2-8 (RAC2-8) | | 12.0 | 11.0 | 21.5 | 26.5 | | | | | | | | |
| | RAP2-A8 | 8.4 | 18.0 | 14.0 | 27.5 | 32.5 | | | | | | | | |
| | RAP2-B8 | | 16.0 | 16.0 | 28.5 | 33.5 | | | | | | | | |
| | RAP2-10 | | 14.5 | 12.3 | 24.0 | 29.0 | | | | | | | | |
| | RAP2-A10 | 10.5 | 18.0 | 14.0 | 27.5 | 32.5 | | | | | | | | |
| | RAP2-B10 | | 20.0 | 18.0 | 32.5 | 37.5 | | | | | | | | |
| | RAP2-12 | | 17.0 | 13.9 | 26.9 | 31.9 | | | | | | | | |
| | RAP2-A12 | 13.0 | 22.0 | 14.0 | 29.5 | 34.5 | | | | | | | | |

1. 各呼びの印は、JIS規格品、CSA登録品です。()はJIS規格品の呼びを示します。
 2. CSA登録品としてご使用の際は、注文時にご指示ください。カートンがCSA品用となります。
 3. 上記寸法表にかぎらず特注品もご相談ください。
- ※…表の絶縁被覆のカラーは、あくまで標準色です。ご用意できるカラーはP.20をご参照下さい。

