


RoHS 指令対応品

	呼 び		呼 び		各 部 の 寸 法							標準色	適合電線範囲		適合工具	一箱入数	
	規格	ビニル	規格	ナイロン	d ₂	B	φd ₁	F ₁	l ₂	l	L ₁		板厚	撚線mm ²			AWG
スト レ ー ト 形	UL SF	AVYT1-3	SF	APYT1-3	3.2	5.8	3.3	6.6	9.5	14.1	19.1	0.8	赤※	0.5 ~ 1.65	20-16	*DS-Hi3 *DS-Hi34 *DS-Hi34S *DH-1B *DS-A5 PALM-032A	500 (100×5)
	UL SF	AVYT1-3.5	SF	APYT1-3.5	3.7	6.5											
	UL SF	AVYT1-S4	SF	APYT1-S4	4.3	7.5											
	UL SF	AVYT1-4	SF	APYT1-4	4.3	8.0	10.0	7.5	9.5	15.5	20.0	0.8	赤※	0.5 ~ 1.65	20-16	*DS-Hi3 *DS-Hi34 *DS-Hi34S *DH-1B *DS-A5 PALM-032A	400 (100×4)
	UL SF	AVYT1-5	SF	APYT1-5	5.3	8.0											
	UL SF	AVYT1-6	SF	APYT1-6	6.4	11.5											
	UL SF	AVYT2-3M	SF	APYT2-3M	3.2	6.5	3.9	5.1	9.5	12.5	17.5	0.8	青※	1.04 ~ 2.63	16-14	*DS-Hi4 *DS-Hi34 *DS-Hi34S *DH-1B *DS-A5 PALM-032A	500 (100×5)
	UL SF	AVYT2-3	SF	APYT2-3	3.2	6.0											
	UL SF	AVYT2-3.5M	SF	APYT2-3.5M	3.7	6.5											
	UL SF	AVYT2-3.5	SF	APYT2-3.5	3.7	6.5	11.5	5.1	9.5	12.5	17.5	0.8	青※	1.04 ~ 2.63	16-14	*DS-Hi4 *DS-Hi34 *DS-Hi34S *DH-1B *DS-A5 PALM-032A	400 (100×4)
	UL SF	AVYT2-S4	SF	APYT2-S4	4.3	7.5											
	UL SF	AVYT2-4	SF	APYT2-4	4.3	8.5											
	UL SF	AVYT2-5	SF	APYT2-5	5.3	12.0	5.4	8.8	14.0	19.5	27.2	1.0	黄※	2.63 ~ 6.64	12-10	*DS-Hi5 *DH-1B *DS-A5	300 (100×3)
	UL SF	AVYT2-6	SF	APYT2-6	6.4	12.0											
	UL SF	AVYT3-4	SF	APYT3-4	4.3	9.5											
UL SF	AVYT3-5	SF	APYT3-5	5.3	9.5	10.2	8.8	14.0	19.5	27.2	1.0	黄※	2.63 ~ 6.64	12-10	*DS-Hi5 *DH-1B *DS-A5	300 (100×3)	
UL SF	AVYT3-6	SF	APYT3-6	6.4	12.0												
UL SF	AVYT3-6	SF	APYT3-6	6.4	12.0												
拡 管 形	UL SF	BVYT1-3	SF	BPYT1-3	3.2	5.8	4.1 (4.0)	6.6	9.0	14.1	18.6	0.8	赤※	0.5 ~ 1.65	20-16	*DS-Hi3 *DS-Hi34 *DS-Hi34S *DH-1B *DS-A5 PALM-032A	500 (100×5)
	UL SF	BVYT1-3.5	SF	BPYT1-3.5	3.7	6.5											
	UL SF	BVYT1-S4	SF	BPYT1-S4	4.3	7.5											
	UL SF	BVYT1-4	SF	BPYT1-4	4.3	8.0	10.0	7.5	9.0	15.5	19.5	0.8	赤※	0.5 ~ 1.65	20-16	*DS-Hi3 *DS-Hi34 *DS-Hi34S *DH-1B *DS-A5 PALM-032A	400 (100×4)
	UL SF	BVYT1-5	SF	BPYT1-5	5.3	8.0											
	UL SF	BVYT1-6	SF	BPYT1-6	6.4	11.5											
	UL SF	BVYT2-3M	SF	BPYT2-3M	3.2	6.5	4.7 (4.5)	5.1	9.0	12.5	17.0	0.8	青※	1.04 ~ 2.63	16-14	*DS-Hi4 *DS-Hi34 *DS-Hi34S *DH-1B *DS-A5 PALM-032A	500 (100×5)
	UL SF	BVYT2-3	SF	BPYT2-3	3.2	6.0											
	UL SF	BVYT2-3.5M	SF	BPYT2-3.5M	3.7	6.5											
	UL SF	BVYT2-3.5	SF	BPYT2-3.5	3.7	6.5	11.5	5.1	9.0	12.5	17.0	0.8	青※	1.04 ~ 2.63	16-14	*DS-Hi4 *DS-Hi34 *DS-Hi34S *DH-1B *DS-A5 PALM-032A	400 (100×4)
	UL SF	BVYT2-S4	SF	BPYT2-S4	4.3	7.5											
	UL SF	BVYT2-4	SF	BPYT2-4	4.3	8.5											
	UL SF	BVYT2-5	SF	BPYT2-5	5.3	12.0	6.4	8.8	13.5	19.5	26.7	1.0	黄※	2.63 ~ 6.64	12-10	*DS-Hi5 *DH-1B *DS-A5	300 (100×3)
	UL SF	BVYT2-6	SF	BPYT2-6	6.4	12.0											
	UL SF	BVYT3-4	-	-	4.3	9.5											
UL SF	BVYT3-5	-	-	5.3	9.5	10.2	8.8	13.5	19.5	26.7	1.0	黄※	2.63 ~ 6.64	12-10	*DS-Hi5 *DH-1B *DS-A5	300 (100×3)	
UL SF	BVYT3-6	-	-	6.4	12.0												

1. 各呼びの印は、UL登録品、CSA登録品です。
 2. CSA登録品としてご使用の際は、注文時にご指示ください。カートンがCSA品用となります。
 3. ()は、BPYT形の寸法です。
 4. *印はUL適合工具です。
 ※…表の絶縁被覆のカラーは、あくまで標準色です。ご用意できるカラーはP.20をご参照下さい。

AV · AP

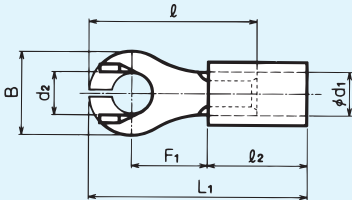

BV · BP

